

120.0kW¹ Industrial Process Chiller – Model TALF8

PRODUCT

TALF8



The TALF8 is a high-performance industrial glycol chiller designed to provide reliable and efficient cooling for demanding process cooling applications. Delivering up to 120.0kW of cooling capacity, the unit incorporates a generous 200-litre integral buffer tank and high-performance 3.8 Bar circulation pump, providing a complete, ready-to-install cooling solution for industrial environments.

Engineered for long-term reliability, the TALF8 features a non-ferrous water circuit as standard. This premium design helps minimise corrosion, maintain fluid quality and reduce maintenance requirements, offering a significant advantage over many competing chillers that utilise ferrous components within the cooling circuit.

Manufactured in Italy by nVent HOFFMAN, a global leader in industrial thermal management solutions, the TALF8 combines robust European engineering with dependable industrial performance. Featuring weatherproof construction suitable for both indoor and outdoor installation, the unit is designed to withstand demanding operating conditions while delivering consistent temperature control year-round.

Suitable for a wide variety of industrial process cooling applications, the TALF8 provides accurate and dependable temperature control where reliability and continuous operation are essential.

INDUSTRY STANDARDS

CE; UKCA

PRODUCT ATTRIBUTES

Cooling Duty @ 15°C Fluid, 32°C Ambient:	67.0kW
Cooling Duty @ -4°C Fluid, 20°C Ambient:	44.2kW
Refrigerant:	R410a
Settable Fluid Temperature Range:	-5°C to +15°C
Nominal Fluid Flow Rate:	11,524 Litres/Hour
Ambient Temperature Operating Range:	-10°C to +45°C
Internal Pump Nominal Pressure:	3.8 Bar
Internal Tank Capacity:	200 Litres
Connection Sizes:	1 1/2" BSP(F)
Power:	400V / 3Ph / 50Hz
Dimensions (mm):	2138 (H) x 1795 (L) x 945 (W)
Net Weight:	600kg
Suitable for:	Indoor or Outdoor Installation

¹ Maximum possible cooling capacity.

KEY FEATURES & BENEFITS


- Cooling capacity up to 120.0kW
- Non-ferrous water circuit for enhanced corrosion resistance
- Integral 200-litre buffer tank
- High-performance 3.8 Bar circulation pump
- Weatherproof construction suitable for indoor or outdoor installation
- Industrial 400V three-phase power supply
- Manufactured in Italy by nVent HOFFMAN
- Reliable industrial-grade construction
- Ideal for a wide range of process cooling applications

CERTIFICATIONS



ADDITIONAL PRODUCT DETAILS

Note: Items are customisable, contact Nexus to configure.

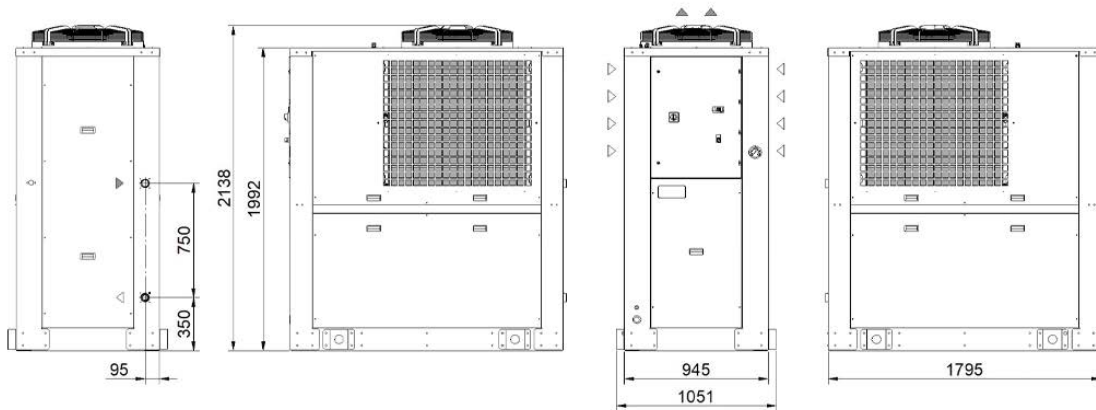

Correction factors for calculating the cooling power

Water outlet temperature	Fw	°C		8	10	15	20	25		
		factor		0.77	0.83	1	1.2	1.41		
Ambient temperature	Fa	°C		15	20	25	32	35	40	45
		factor		1.27	1.2	1.13	1	0.95	0.86	0.8
Percentage glycol by weight	Fg	%	0	10	15	20	25	30	35	40
		factor	1	0.96	0.95	0.94	0.93	0.91	0.9	0.88

Cooling power = Nominal cooling power x Fw x Fa x Fg
 *120,000 W is the maximum achievable cooling capacity for Size 5 chillers.



Nexus Cooling, Unit 1, Innovation Way, Sheffield, S13 9AD
 Tel: 0121 270 9485 / 01202 250 100
www.nexuscooling.co.uk / info@nexuscooling.co.uk

